



ACWA [ATOM COUNTERWEIGHT ASSIST CONFIGURATION]

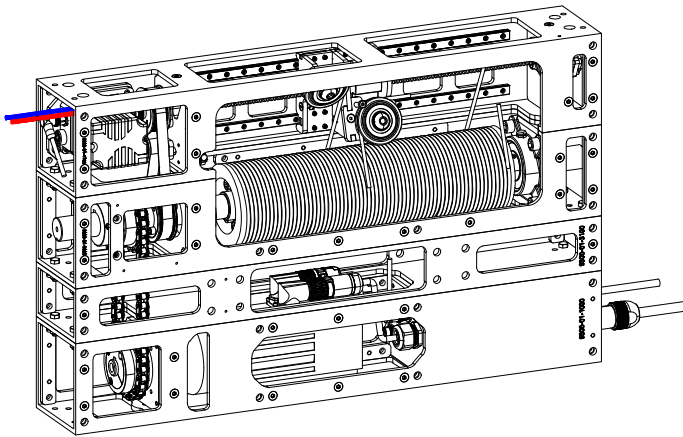


SPECIFICATIONS:

DIMENSIONS:	30.00" x 18.00" X 5.00"
WEIGHT:	125LBS
POWER:	8A @ 230VAC
MOTOR:	SYNCHRONOUS 2.2 kW
PROTOCOL:	AXISAFE
WIRE ROPE:	Ø $\frac{3}{16}$ "
DRUM PD:	Ø4.4375"
TRAVEL:	31.5FT / 63FT
CAPACITY (CWA):	2200LBS
CAPACITY (DEAD HAUL):	400LBS
STANDARD GEARING:	45 IPS

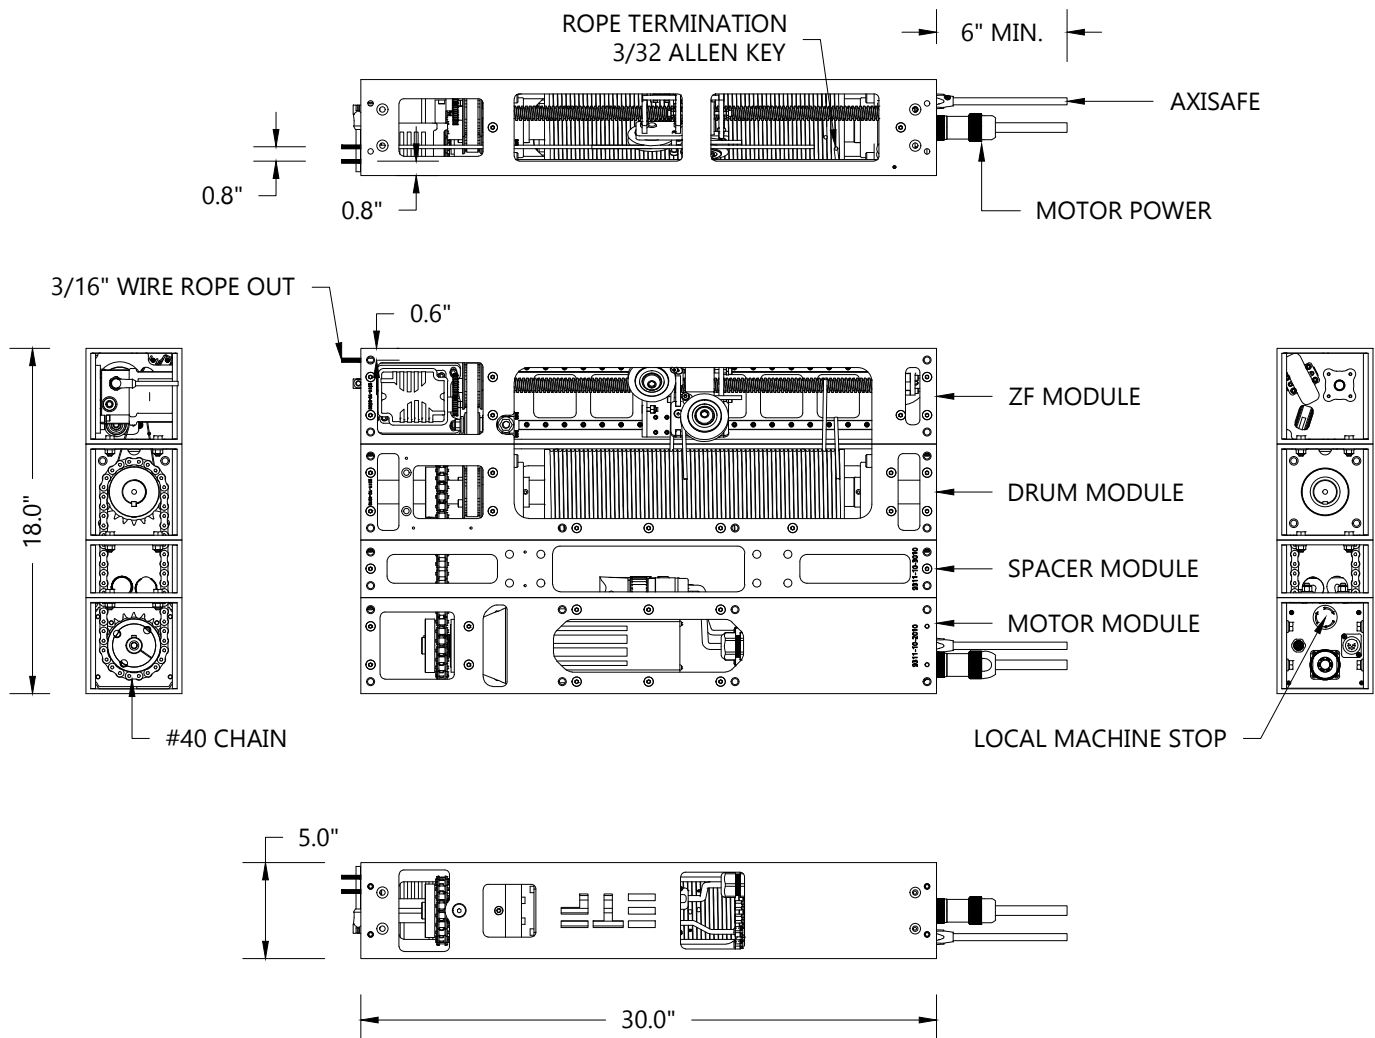

Function:

The ATOM is small, but mighty! A 2.2kW synchronous gearmotor powers this dense machine. small enough to fit in the t-bar of a 6" center house, but can move a 2,000lb payload. On its side, it fits within a 6-1/4" show deck, and can pull a 2,000lb wagon with ease. Standard assembly is zero fleet, but a simple adapter allows it to be used with a tandem endless loop. It also powers the ETF Slider Technology. Versatile, compact, modular, powerful. The ETF ATOM.



SYSTEM:
ATOM
COMPONENT:
ACWA CONFIGURATION
RELEASE:
1.3

THIS DOCUMENT CONTAINS CONFIDENTIAL AND PROPRIETARY INFORMATION THAT CANNOT BE REPRODUCED OR DISCLOSED IN WHOLE OR IN PART, WITHOUT WRITTEN AUTHORIZATION FROM EMPIRE TECHNICAL FABRICATION, LLC.
©2026 EMPIRE TECHNICAL FABRICATION, LLC.

CATALOG NUMBER:

C93-0100